


HYUNDAI SOLAR MODULE

KI
SERIES

Mono-Crystalline Type

HiS-S345KI HiS-S350KI HiS-S355KI HiS-S360KI
HiS-S365KI HiS-S370KI HiS-S375KI HiS-S380KI

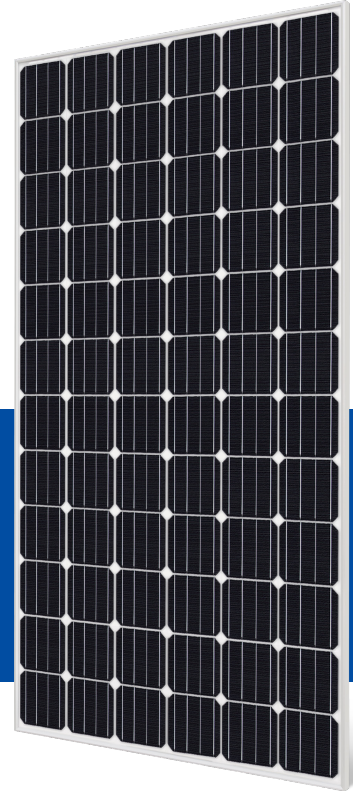

72

Cells



For Utility-Scale Applications



UL 1,500V Saves BOS Costs



More Power Generation In Low Light



Hyundai Cell



PERL Technology

PERL technology provides ultra-high efficiency with better performance in low irradiation. Maximizes installation capacity in limited space.



Anti-LID / PID

Both LID(Light Induced Degradation) and PID(Potential Induced Degradation) are strictly eliminated to ensure higher actual yield during lifetime.



Mechanical Strength

Tempered glass and reinforced frame design withstand rigorous weather conditions such as heavy snow and strong wind.



Reliable Warranty

Global brand with powerful financial strength provide reliable 30-year warranty.



Corrosion Resistant

Various tests under harsh environmental conditions such as ammonia and salt-mist passed.



UL / VDE Test Labs

Hyundai's R&D center is an accredited test laboratory of both UL and VDE.

Hyundai's Warranty Provisions



- 12-Year Product Warranty
- On materials and workmanship



- 30-Year Performance Warranty
- Initial year: 97.6%
- Linear warranty after second year: with 0.6%p annual degradation, 80.2% is guaranteed up to 30 years

About Hyundai Solar

Established in 1972, Hyundai Heavy Industries (HHI) is one of the most trusted names in the heavy industries sector with 48,000 employees and more than 40 Billion USD in annual sales (2015). As a global leader and innovator, Hyundai Heavy Industries is committed to building a future growth engine by developing and investing heavily in the field of renewable energy.

Started as a core business division of HHI, Hyundai Solar (Hyundai Heavy Industries Green Energy) now stands as an independent company and an affiliate of HHI as from December 2016. We have strong pride in providing high-quality solar PV products to more than 3,000 customers worldwide.

Certification



Electrical Characteristics

		Mono-Crystalline Type(HiS-S ___KI)							
		345	350	355	360	365	370	375	380
Nominal Output (P _{mpp})	W	345	350	355	360	365	370	375	380
Open Circuit Voltage (V _{oc})	V	46.9	47.1	47.3	47.4	47.6	47.8	48.0	48.2
Short Circuit Current (I _{sc})	A	9.6	9.6	9.7	9.8	9.9	9.9	10.0	10.1
Voltage at P _{max} (V _{mpp})	V	38.6	38.7	38.9	39.1	39.3	39.5	39.7	39.8
Current at P _{max} (I _{mp})	A	9.0	9.0	9.1	9.2	9.3	9.4	9.4	9.5
Module Efficiency	%	17.6	17.9	18.1	18.4	18.7	18.9	19.2	19.4
Cell Type	-	6", mono-crystalline silicon							
Maximum System Voltage	V	1,500							
Temperature Coefficient of P _{max}	%/K	-0.386							
Temperature Coefficient of V _{oc}	%/K	-0.31							
Temperature Coefficient of I _{sc}	%/K	0.031							

*All data at STC (Standard Test Conditions). Above data may be changed without prior notice.

Mechanical Characteristics


Dimensions	998 mm (39.29") (W) × 1,960 mm (77.17") (L) × 40 mm (1.57") (H)
Weight	Approx. 22.9 kg (50.5 lbs)
Solar Cells	72 cells in series (6 × 12 matrix) (Hyundai cell, Made in Korea)
Output Cables	4 mm ² (12AWG) cables with polarized weatherproof connectors, IEC certified (UL listed and UL 4703 certified), Length 1.2 m (47.2")
Junction Box	IP67, weatherproof, IEC certified (UL listed)
Bypass Diodes	3 bypass diodes to prevent power decrease by partial shade
Construction	Front : Anti-reflection coated glass, 3.2 mm (0.126") Encapsulant : EVA Back Sheet : Weatherproof film
Frame	Clear anodized aluminum alloy type 6063

Installation Safety Guide

- Only qualified personnel should install or perform maintenance.
- Be aware of dangerous high DC voltage.
- Do not damage or scratch the rear surface of the module.
- Do not handle or install modules when they are wet.

Nominal Operating Cell Temperature	46°C ± 2
Operating Temperature	-40 – 85°C
Maximum System Voltage	DC 1,500 V (UL)
Maximum Reverse Current	15A (Up to 350W) 20A (Above 355W)

Module Diagram (unit : mm)

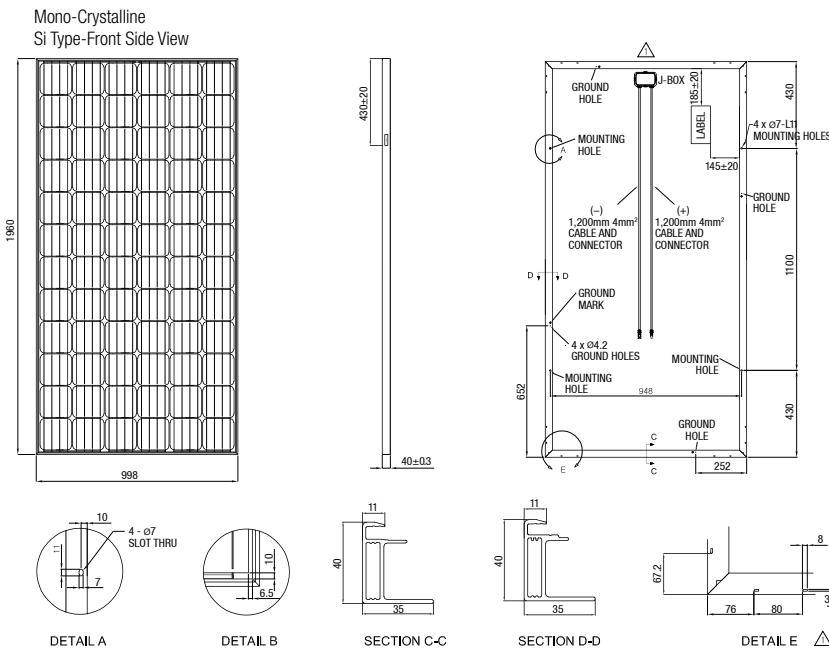

I-V Curves

